



Installation Instructions

Part Number 33-2190

This filter fits: **See current K&N catalog for complete listing**

FREE K&N DECAL** To register your warranty, please see us online at knfilters.com/register. **FREE K&N DECAL

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter is a direct replacement for the stock air filter, and no modifications will be required. However the following procedure **MUST** be followed to ensure a proper fit and seal of the K&N Air Filter.

INSTALLATION

1. Carefully disconnect the Mass Air Sensor electrical connector. (Fig. 1)
2. Unfasten the 5 clips securing the airbox lid to the airbox base.
3. Remove the 3 bolts securing the Mass Air Sensor to the airbox lid. There are 2 bolts on the driver's side of the airbox lid and 1 bolt on the passenger's side. (Fig. 1 & 2)
4. Carefully slide the airbox lid off of the Mass Air Sensor. Be careful not to lose or damage the sealing o-ring while separating.
5. Remove the stock air filter.
6. With a damp rag wipe off any dust or dirt from the inside of the airbox lid and base. The airbox must be clean and dry so that the gasket will stick.
7. Apply the self-adhering gasket to the groove on the airbox lid (Fig. 3)
8. Install the K&N Air Filter into the airbox base.
9. Re-install the airbox lid onto the Mass Air Sensor being careful not to damage the sealing o-ring. Re-install the three bolts securing the Mass Air Sensor to the lid and torque to manufacture's recommended specifications.
10. Install the air box lid onto the airbox base and fasten the 5 clips. Re-connect the Mass Air Sensor electrical connector.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

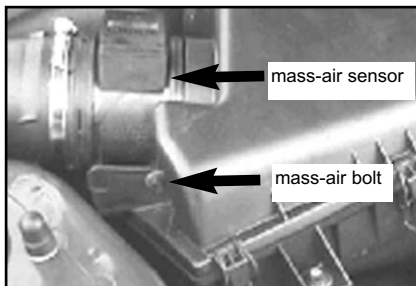


Fig. 1

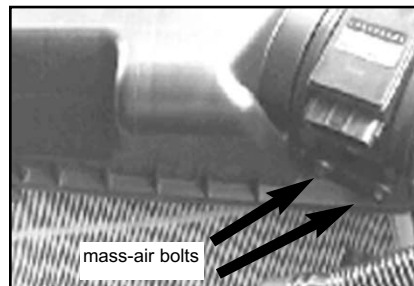


Fig. 2



Fig. 3